


SL4 T.A.7  
Sinkerless Single-Jersey Machine  
Open Width Frame

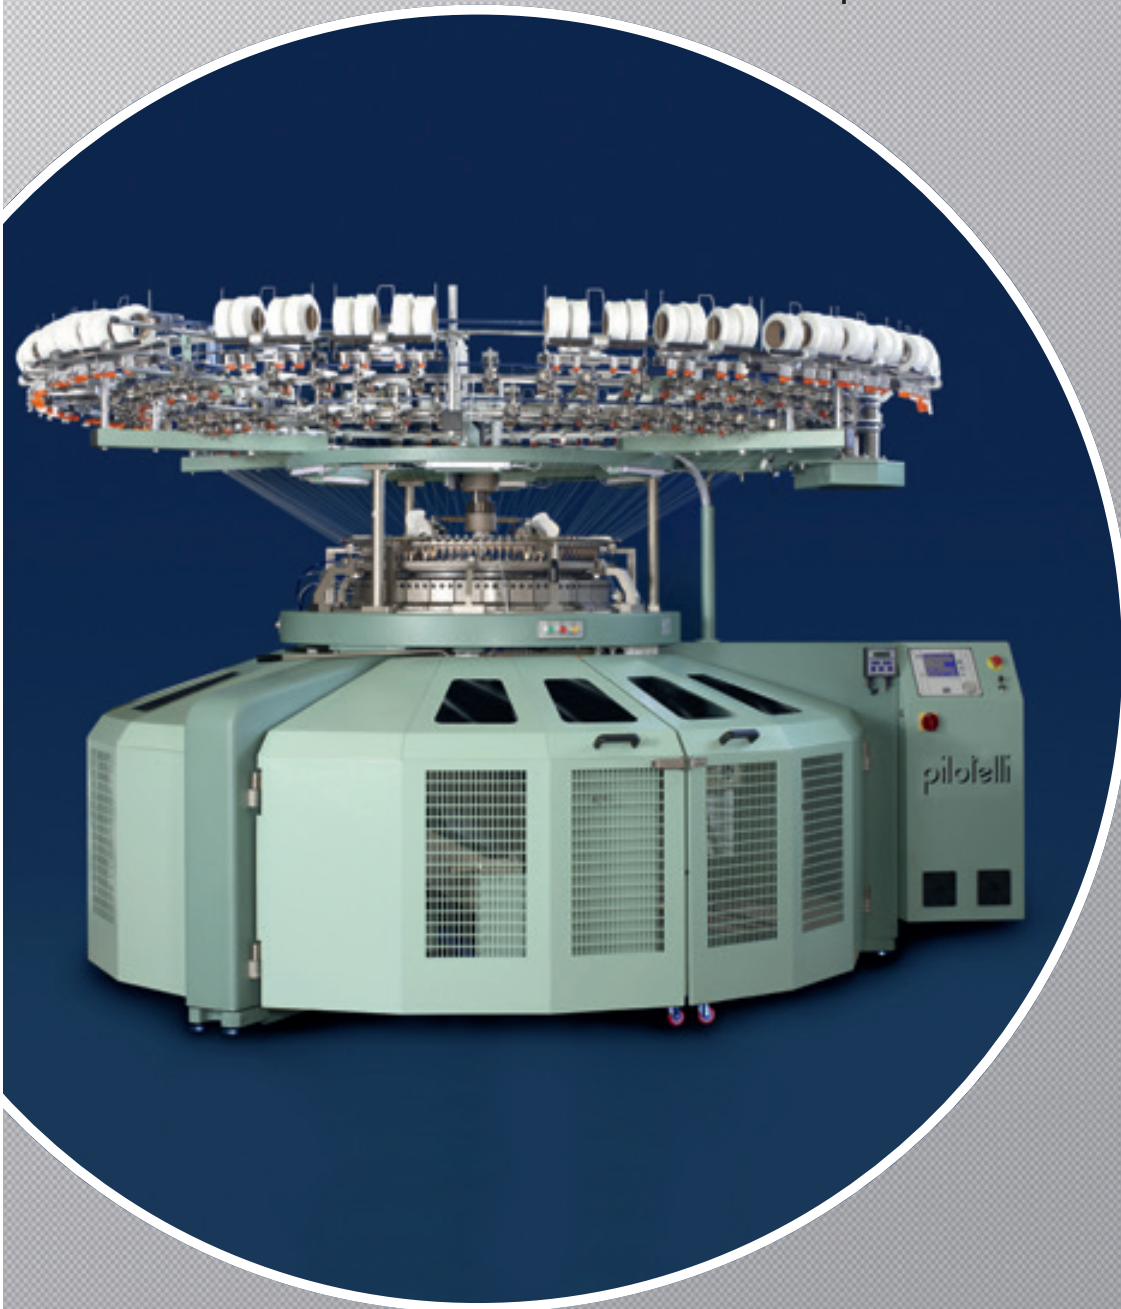

experience makes the difference

# SL4 T.A.7 JVCE-4 | J 3.0-4

Sinkerless Single-Jersey Machine with Open Width Frame

## Equipment

- 4 needle tracks, 3 equipped with needles and cams
- Memminger Iro Navigator Digital Terminal
- Tube creel preparation (without creel elements)
- Groz Beckert needles
- Kern Liebers sinkers
- Elastane on each feeder with Memminger Iro MER3 (without cover)
- 3 holes zirconium yarn carriers
- Central stitch length adjustment
- Click clack system for yarn carriers positioning
- ILE fabric scanner
- Memminger IRO MPF positive feeding units
- Drive tower positioned outside of yarn path for easy handling
- Needle bed lighting
- Venticleaner on top and inside cylinder with 2 fan units
- Electronic needle detectors
- Optional:
  - 4<sup>th</sup> track cams
  - exchange cams for needle positions in KNIT-TUCK-MISS
  - 1-feeder (J 3.0-4) cylinder cam boxes or 3-feeder (JVCE-4) cylinder cam boxes

## Frame

- T.A.7 Type Open Width Frame
- Fabric width up to 2300 mm (up to 34")
- Fabric width up to 2500 mm (36"– 40")
- Fabric roll diameter up to Ø 380 mm
- 3 hand levers
- Oil bath for cylinder bearing
- Cadratex fabric spreader
- Ceramic cutting blade
- Conversion kit for tubular knitting
- Optional:
  - electrical cutting device

## Lubrication

- Pulsonic 5.2 oiler (air consumption 280 l/min)
- Optional:
  - Uniwave pneumatic oiler


## Electrical Specification

- 380 V/50 cycles
- Memminger Iro Delta inverter
- Frequency controlled drive (AC) 5,5 kW

Type	SL4 T.A.7 JVCE-4   J 3.0-4							
Diameter in inch	26"	28"	30"	32"	34"	36"	38"	40"
No. of feeders	78	84	90	96	102	108	114	120
Gauges E	14 – 40							



knitting head (3-feeder cam boxes)

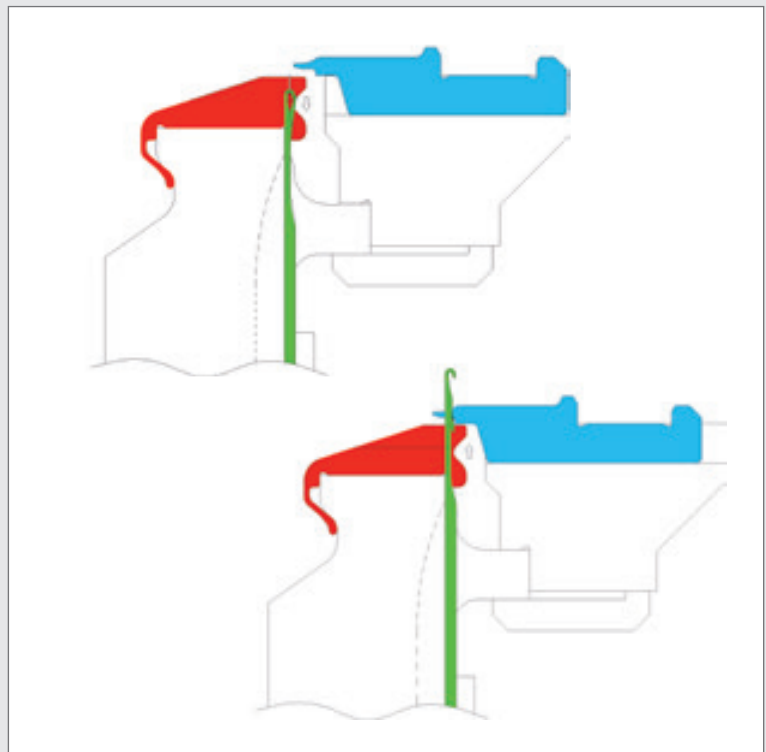

sinkerless technology