experience makes the difference

Product Range

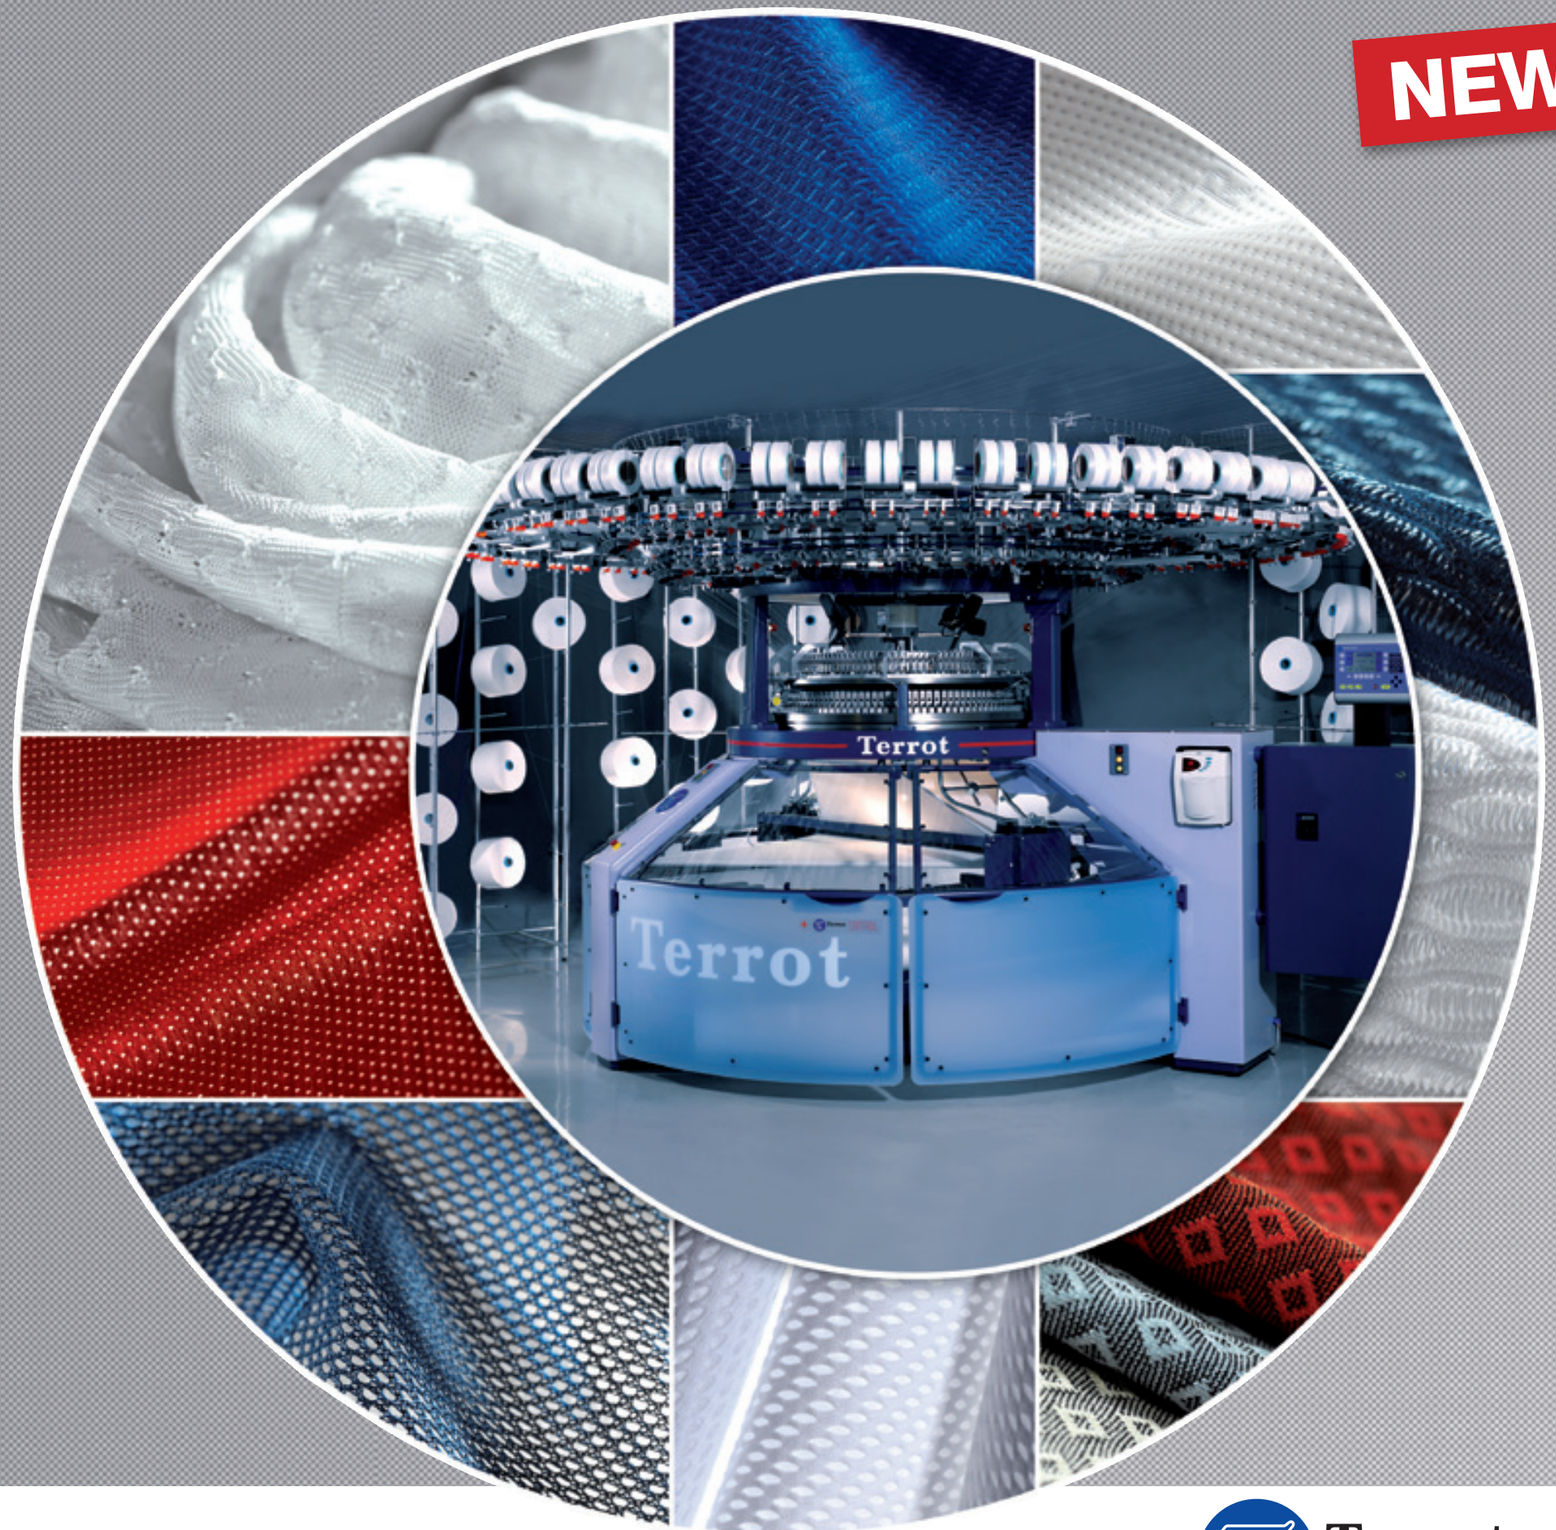

Subject to technical changes. Illustrations may show accessories that are not included in the standard version. Program update 01/2014

Paul-Gruner-Straße 72B | 09120 Chemnitz Germany
phone: +49 371 5201-0 | fax: +49 371 5201-200
e-mail: info@terrot.de | www.terrot.de

Terrot

CIRCULAR KNITTING MACHINES DOUBLE-JERSEY

MACHINE TYPE	KNITTING TECHNIQUE	NUMBER OF NEEDLE TRACKS CYLINDER	DIAL	FEEDS PER INCH DIAMETER	MACHINE GAUGES GG	MACHINE DIAMETER IN INCH
I2108	Interlock	2	2	3.6	18 – 50	24 – 42
I3P154	8-lock/Rib	2	2	1.8	10 – 36[3]	24 – 38
I3P254	8-lock/Rib	2	2	1.8	14 – 36[3]	30, 34, 36, 38
I3P354	8-lock/Rib	4	2	1.8	12 – 32	24 – 38
I3P572	8-lock/Rib	4	3	2.4	14 – 32	30, 34, 38
I3P572R NEW!	8-lock/Rib	2	2	2.4	14 – 32	30, 34, 38
I3P184	8-lock/Rib	4	2	2.8	18 – 36	30 – 38, 40[3]
I3P284	8-lock/Rib	2	2	2.8	18 – 36	30 – 40
I3P284-1	8-lock/Rib	2	2	2.8	18 – 50	30 – 42
I3P4F142	8-lock/Rib/Striper	2	2	1.4	12 – 28	30, 34
UP248	Mini-Jacquard 3-Way-Techn.	36/72 wales pattern width	2	1.6	6 – 32	30, 34, 38, 42
UP248-1	Mini-Jacquard 3-Way-Techn.	36/72 wales pattern width	2	1.6	18 – 40	30, 34
UP248M	Mini-Jacquard Mattress 3-Way-Techn.	36/72 wales pattern width	2	1.6	18 – 22	30, 34, 38, 42
UP248T	Mini-Jacquard Transfer 3-Way-Techn.	36/72 wales pattern width	2	1.6	12 – 18 (24 – 32)	30, 34
UP472	Mini-Jacquard 3-Way-Techn.	36/72 wales pattern width	2	2.4	12 – 40	30 – 42
UP472M	Mini-Jacquard Mattress 3-Way-Techn.	36/72 wales pattern width	2	2.4	18 – 22	30, 34, 38, 42, 48
UP592M	Mini-Jacquard Mattress	36/72 wales pattern width	2	3.05	18 – 22	38
UCC548	Electronic-Jacquard[1]	Piezo needle selection	2	1.6	6 – 36	30 – 38, 42
UCC548-1	Electronic-Jacquard[1]	Piezo needle selection	2	1.6	18 – 40	30[3], 34
UCC548-I[3] NEW!	Electronic-Jacquard Interlock[1]	Piezo needle selection Interlock pre-selection unit	2	1.6	6 – 36[3]	30 – 38, 42[3]
UCC548ME	Mattress[2] Double-Electronic	Piezo needle selection	Piezo needle s.	1.6	18 – 22	38, 42[3]
UCC548MS NEW!	Mattress[1] High Speed	Piezo needle selection	2	1.6	18 – 22	38, 42[3], 48[3]
UCC548T	Electronic-Jacquard Transfer[1]	Piezo needle selection	2	1.6	12 – 18 (24 – 32)	30, 34
UCC572	Electronic-Jacquard[1]	Piezo needle selection	2	2.4	14 – 40	30, 34, 38, 42, 48
UCC572-I NEW!	Electronic-Jacquard Interlock[1]	Piezo needle selection Interlock pre-selection unit	2	2.4	14 – 40	30[3], 34, 38[3], 42[3], 48[3]
UCC572M	Mattress[1]	Piezo needle selection	2	2.4	18 – 22	30[3], 34[3] 38, 42, 48
UCC594M NEW!	Mattress[2]	Piezo needle selection	2	3.05	18 – 22	38
UCC572T	Electronic-Jacquard Transfer[1]	Piezo needle selection	2	2.4	16 – 18 (24 – 32)	30[3], 34
RH216	Rib	1	1	1.8	10 – 18 10 – 22 10 – 24	8, 9 10, 11 12 – 23
RH216-I	Interlock	2	2	1.8	14 – 18 14 – 22 14 – 24 14 – 26 14 – 28	12, 13 14 – 16 17 – 20 21 22, 23

CIRCULAR KNITTING MACHINES SINGLE-JERSEY

MACHINE TYPE	KNITTING TECHNIQUE	NUMBER OF NEEDLE TRACKS CYLINDER	SINKER CAM	FEEDS PER INCH DIAMETER	MACHINE GAUGES GG	MACHINE DIAMETER IN INCH
S2112-2	Single plain/structures	4	1	3.7	18 – 54	26, 30 – 42[3]
S296-1	Single plain/structures High Speed	4	1	3.2	12 – 54	26 – 42, 44[3] – 54[3]
S296-2	Single plain/structures High Speed	4	1	3.2	12 – 54	26 – 42, 44[3] – 54[3]
SH124	Single plain/structures	4	1	2.4	18 – 36	30, 34
SH130	Single plain/structures	4	1	3.0	12 – 36	16 – 36
SBF124	3-thread fleece	4	1	2.4	16 – 24	30, 34
SBF130	3-thread fleece	4	1	3.0	12 – 24	16 – 24, 28, 30
SBF296-1	3-thread fleece	4	1	3.2	16 – 24	26 – 36
SBF296-2	3-thread fleece	4	1	3.2	16 – 24	26 – 36
S4F348 S6F348	Single Striper	4	1	1.6	12 – 36	26, 30, 34
S3P148 S3P248	Mini-Jacquard 3-Way-Techn.	36/72 wales pattern width	1	1.6	6 – 12 14 – 40[3]	26, 30, 34 26, 30, 34
S3P4F248 S3P6F248	Mini-Jacquard Striper 3-Way-Techn.	36/72 wales pattern width	1	1.6	14 – 36	26, 30, 34
S3P172-1	Mini-Jacquard 3-Way-Techn.	36/72 wales pattern width	1	2.4	12 – 40[3]	26, 30, 34, 36[3], 38
SCC548	Electronic-Jacquard 3-Way-Techn.	Piezo needle selection	1	1.6	6 – 12 14 – 40	26, 30, 34 26, 30, 34
SCC572	Electronic-Jacquard 3-Way-Techn.	Piezo needle selection	1	2.4	14 – 40	26, 30, 34, 36, 38
SCC4F548 SCC6F548	Electronic-Jacquard Striper 3-Way-Techn.	Piezo needle selection	1	1.6	6 – 36	26, 30, 34
SP145U	Plain Plush	1	1	1.5	18 – 24	30

TERROT PATTERN PREPARATION SYSTEM the perfect work place for a quick realisation of pattern ideas

Software MET 5000 (required systems hardware Windows)
Data transfer via USB keychain

TERROT OPEN WIDTH FRAMES with compact frame for optimised operating

Diameter in inch	26 – 36	Frame size	D5/1
Fabric roll in mm	400	Winding width in mm	2400
Diameter in inch	26 – 36	Frame size	D5/2
Fabric roll in mm	600	Winding width in mm	2000

TERROT INDUSTRIAL FRAMES

Frame version with free access to the fabric roll and even for an easy and quick removal of the roll for Terrot Single and Double-Jersey machines*
*except Open Width

Fabric roll diameter	Available machine diameter in inch
800 mm with doffing device	16 – 42
1050 mm with doffing device	26 – 54

① machine available in 2-Way-Technique or 3-Way-Technique; ② machine available in 2-Way-Technique; ③ on request