


High performance  
and top quality in Interlock

I2108



experience makes the difference

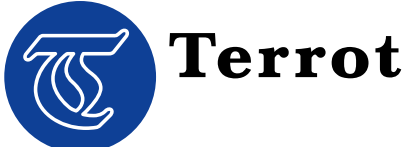

Terrot Interlock machines guarantee an optimum knit performance, high machine speed and excellent fabric quality

## Frame

- Standard C-frame for 500 mm fabric rolls ●
- Gauge conversion „Quick Change“ ●
- Central dial height adjustment ●
- Oil bath for dial drive and cylinder bearing ●
- Hand levers ●
- Uniwave spray oiler ●
- Industrial C-frame for 800 and 1050 mm fabric rolls ○
- Pulsionic 5 oiler ○

## Needles

- 2 types of cylinder needles ●
- 2 types of dial needles ●

## Cam parts

- Exchange cams for KNIT-TUCK-MISS ●
- Special cams for delayed timing/Elastane ○

## Fabric take-down

- Motorized fabric take-down with 3-roller ●
- Automatic winding up device ●
- Segmented take down shaft ●
- Cadratex fabric spreader ●
- Fabric folding device ○
- Fabric basket ○
- Rotating cutting device ○

## Yarn feeding

- 2 rings, 4 step drives ●
- Positive feeding unit type MPF ●
- Ceramic yarn carriers ●
- Standard tube creel ●
- Elastomeric plating equipment with MER ○
- Various creel versions ○

## Electric

- Frequency controlled drive (AC) 4 KW ●
- Control voltage 24 V ●

## Control

- Terrot Control ●
- 5-shift counter ●
- Digital revolution counter ●
- Fabric roll size counter ●
- BDE interface ○

## Additional


- Needle bed lighting ●
- Venticleaner ●
- Electronic needle detectors ●

● Standard ○ Options


Type	I2108				
Diameter in inch	24"	26"	28"	30"	32"
No. of feeders	84	92	100	108	116
Gauges E	18 – 50				

Diameter in inch	34"	36"	38"	40"	42"
No. of feeders	122	130	138	144	152
Gauges E	18 – 42		18 – 38		


further gauges on request

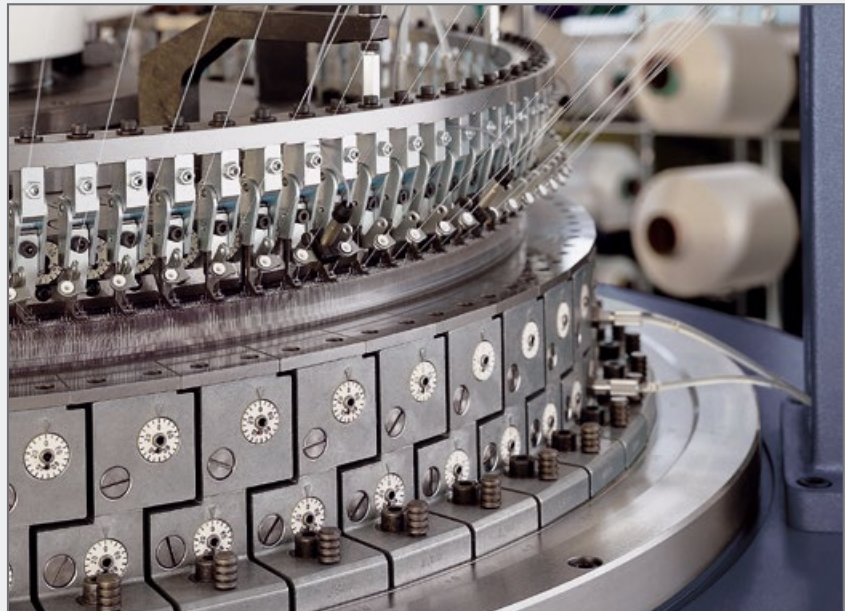

I2108 – knitting head

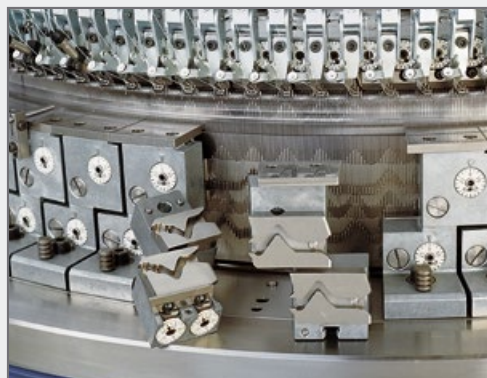

I2108 - 2+2 cam tracks

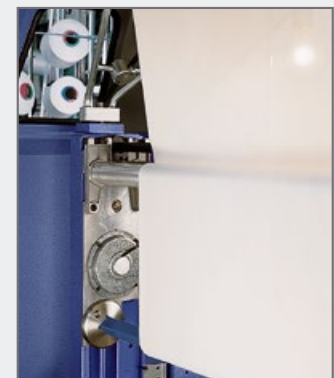

I2108 – fabric take-down

Frontpage: machine model I2108

Subject to technical changes. Illustrations may show accessories that are not included in the standard version. Program update 10/2015