

Single-Jersey Striper with 4 and 6 colours

S4F348
S6F348



experience makes the difference



Terrot Single-Jersey Striper machines with 4- or 6-colour striper and up to 4 needle tracks provide decisive advantage in production and huge application variety

Frame

- Standard C-frame for 500 mm fabric rolls ●
- Gauge conversion „Quick Change“ ●
- Central and individual stitch length adjustment ●
- Oil bath for striper drive and cylinder bearing ●
- Hand levers ●
- Uniwave spray oiler ●
- Industrial C-frame for 800 and 1050 mm fabric rolls ○
- Pulsonic 5 oiler ○

Needles

- Up to 4 types of cylinder needles ●

Cam parts

- Exchange cam in cylinder for 3-Way-Technique in KNIT-TUCK-MISS ●

Fabric take-down

- Motorized fabric take-down with 3-roller ●
- Segmented take down shaft ●
- Automatic winding up device ●
- Cadratex fabric spreader ○
- Fabric folding device ○
- Fabric basket ○
- Rotating cutting device ○

Yarn feeding

- Friction feeder MJS on 1 ring (S4F348) ●
- Friction feeder MJS on 2 rings (S6F348) ●
- Ceramic yarn carriers ●
- Standard tube creel ●
- Elastomeric plating equipment with MER ○
- Various creel versions ○

Electric

- Frequency controlled drive (AC) 4 KW ●
- Control voltage 24 V ●

Control

- Terrot Control ●
- 5-shift counter ●
- Digital revolution counter ●
- Fabric roll size counter ●
- Automatic speed control for plain fabric areas ●
- BDE interface ○


Additional

- Needle bed lighting ●
- Venticleaner ●
- Electronic needle detectors ●


Pattern preparation

- Manually created pattern scheme ●
- Data transfer of striper information via USB stick ●


Type	S4F348/S6F348		
Diameter in inch	26"	30"	34"
No. of feeders	42	48	48
Gauges E	12 – 28		

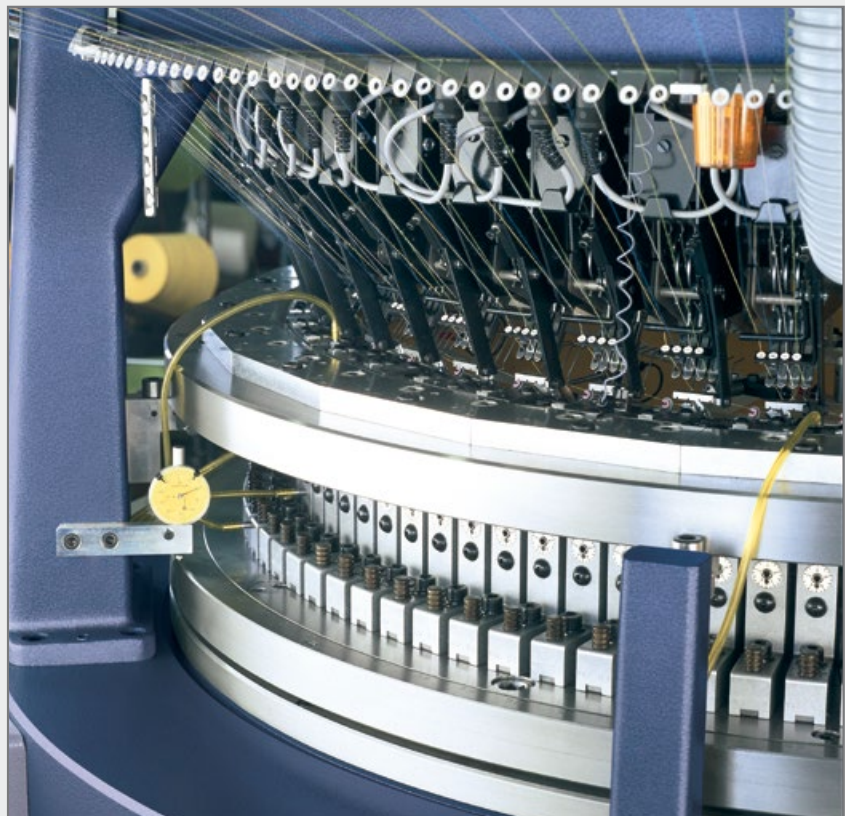

S4F348 – knitting head

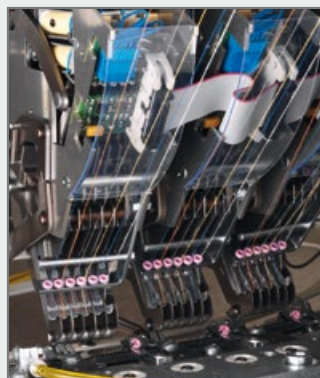

S6F348 – striper unit

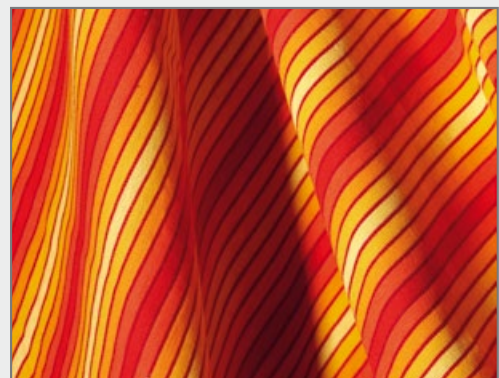

S6F348 – fabric sample

● Standard ○ Options

Frontpage: machine model S4F348

Subject to technical changes. Illustrations may show accessories that are not included in the standard version. Program update 10/2015