


Electronic-Jacquard Single-Jersey 3-Way-Technique

SCC548
SCC572



experience makes the difference

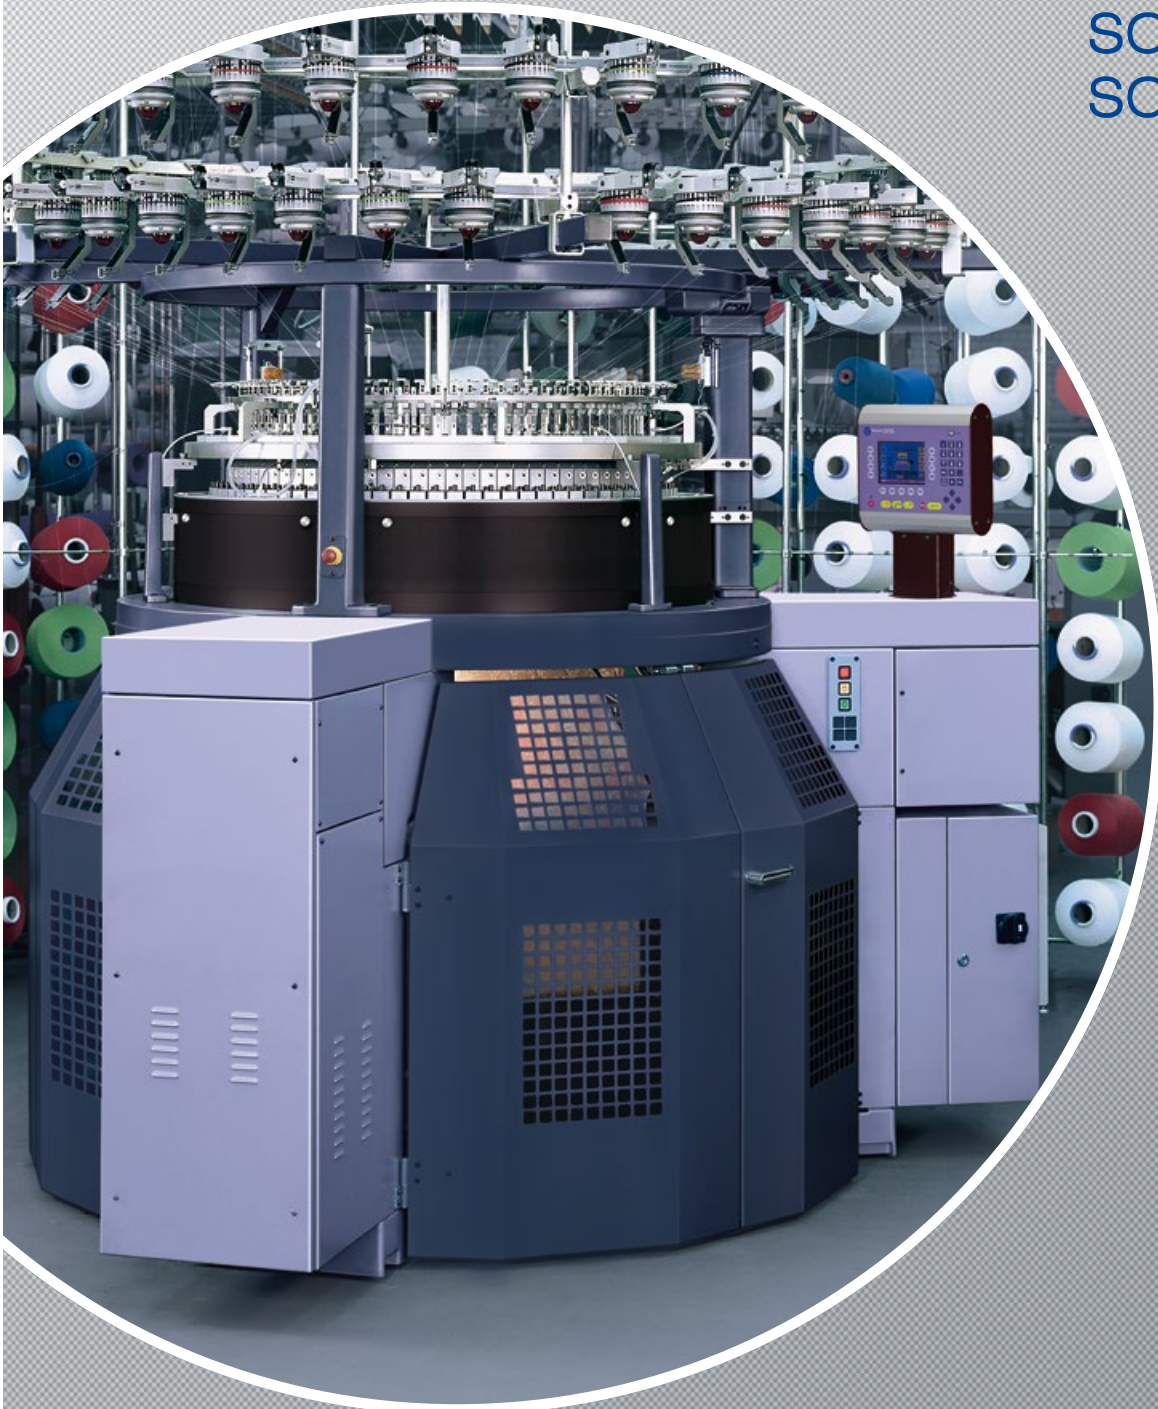

Terrot Electronic-Jacquard Single-Jersey machines with 3-Way-Technique for frequent and rapid pattern change

Frame

- Standard C-frame for 500 mm fabric rolls ●
- Oil bath for cylinder bearing ●
- Hand levers ●
- Uniwave spray oiler ●
- Industrial C-frame for 800 and 1050 mm fabric rolls ○
- Pulsonic 5 oiler ○

Needles

- 1 type of cylinder needles ●

Needle selection

- PIEZO selection mechanism in 3-Way-Technique ●

Cam parts

- 3-Way-Technique ●

Fabric take-down

- Motorized fabric take-down with 3-roller ●
- Segmented take-down shaft ●
- Automatic winding up device ●
- Cadratex fabric spreader ●
- Fabric folding device ○
- Fabric basket ○
- Rotating cutting device ○

Yarn feeding

- SFE Jacquard feeding device ●
- Ceramic yarn carriers ●
- Standard tube creel ●
- Positive feeding unit type MPF ○
- Elastomeric plating equipment with MER ○
- Various creel versions ○

Electric

- Frequency controlled drive (AC) 4 KW ●
- Control voltage 24 V ●

Control

- Terrot Control MT ●
- 5-shift counter ●
- Digital revolution counter ●
- Fabric roll size counter ●
- Controller for individual needle selection ●
- BDE interface ○

Additional

- Needle bed lighting ●
- Venticleaner ●
- Electronic needle detectors ●
- Mesh conversion kit ○
- Needle latch opener ○

Pattern preparation

- Via MET created pattern scheme ●
- Data transfer of pattern information via USB stick ●

● Standard ○ Options

| Type | SCC548 | | | SCC572 | | | | |
|------------------|--------|-----|-----|---------|-----|-----|-----|-----|
| Diameter in inch | 26" | 30" | 34" | 26" | 30" | 34" | 36" | 38" |
| No. of feeders | 42 | 48 | 54 | 62 | 72 | 84 | 88 | 90 |
| Gauges E | 6 – 28 | | | 14 – 40 | | | | |



SCC572 – knitting head



SCC572 – Piezo selection unit



SCC572 – fabric sample