


# 8-Lock Technology for Fine Rib and Interlock

I3P154  
I3P254  
I3P354



experience makes the difference

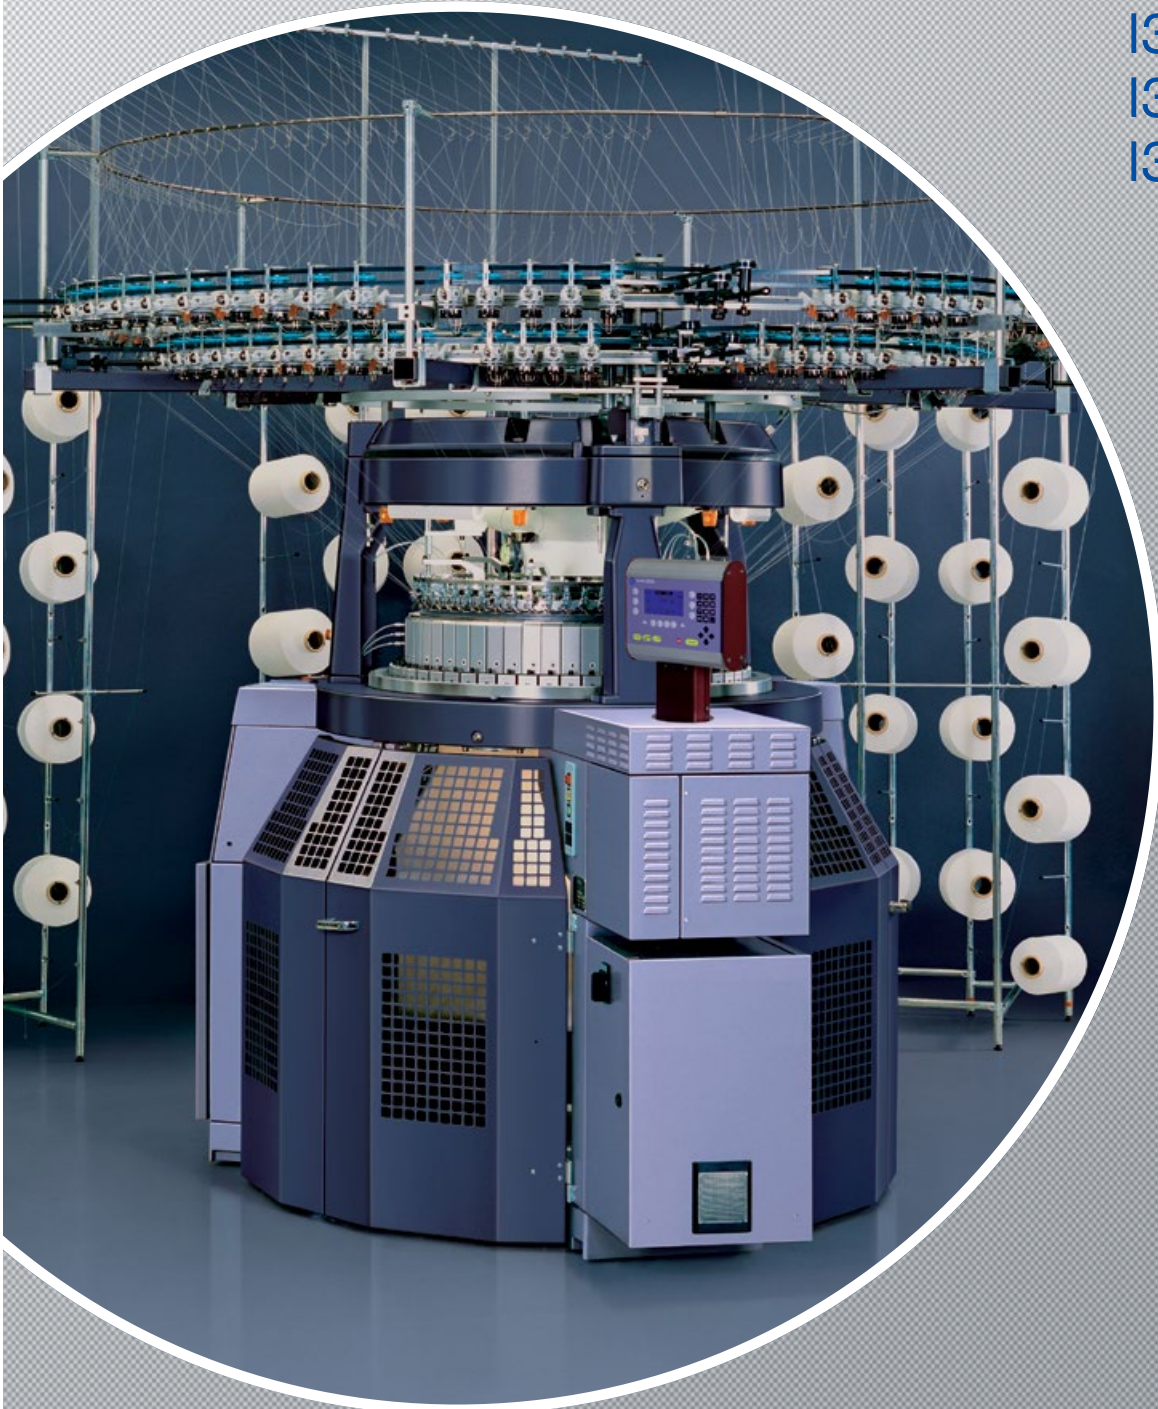

**Terrot**

Terrot I3P 8-lock machines provide universal application options, coupled with maximum flexibility

## Frame

- Standard C-frame for 500 mm fabric rolls
- Gauge conversion „Quick Change“
- Central dial height adjustment
- Oil bath for dial drive and cylinder bearing
- Hand levers
- Uniwave spray oiler
- Industrial C-frame for 800 and 1050 mm fabric rolls
- Pulsonic 5 oiler

## Needles

- 2+2 needle tracks in dial and cylinder (I3P154 | I3P254)
- 2 needle tracks in cylinder and up to 4 needle tracks in dial and cylinder (I3P354)
- Range of delayed timing max. 5,5 mm

## Cam Parts

- Exchange cams for KNIT-TUCK-MISS and SUPPORT (2 + 2 needle tracks)
- DROP CAM SYSTEM changeable from outside (I3P254)

## Fabric take-down

- Motorized fabric take-down with 3-rollers
- Automatic winding up device
- Segmented take down shaft
- Cadratex fabric spreader
- Fabric folding device
- Fabric basket
- Rotating cutting device

## Yarn feeding

- 2 rings, 4 step drives
- Positive feeding unit type MPF
- Ceramic yarn carriers
- Standard tube creel
- Elastomeric plating equipment with MER
- Various creel versions

## Electric

- Frequency controlled drive (AC) 4 KW
- Control voltage 24 V

## Control

- Terrot Control
- 5-shift counter
- Digital revolution counter
- Fabric roll size counter
- BDE Interface

## Additional

- Needle bed lighting
- Venticleaner
- Electronic needle detectors
- Spacer fabric conversion kit
- Yarn carrier for lay-in
- Tuck/support
- Deep stitch cam (I3P254)
- Latch opener
- Plating yarn carrier
- Stitch Meyrinoise (I3P154)
- Fleece (I3P154 | I3P354)

● Standard ○ Options


Type	I3P154							
Diameter in inch	24"	26"	28"	30"	32"	34"	36"	38"
No. of feeders	42	46	50	54	58	60	64	68
Gauges E	10 – 40*							
Needle tracks	2 + 2 in dial and cylinder							

Type	I3P254				I3P354							
Diameter in inch	30"	34"	36"	38"	24"	26"	28"	30"	34"	36"	38"	
No. of feeders	54	60	64	68	42	46	50	54	60	64	68	
Gauges E	14 – 36*				10 – 32							
Needle tracks	2 + 2				2 + 4							

\*on request



I3P354 – knitting head

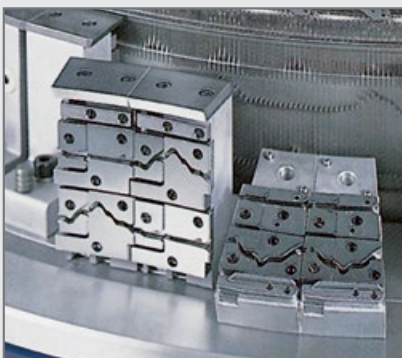

I3P154 – 2 + 2 cam tracks



I3P354 – fabric sample

Frontpage: machine model I3P354

Subject to technical changes. Illustrations may show accessories that are not included in the standard version. Program update 10/2015